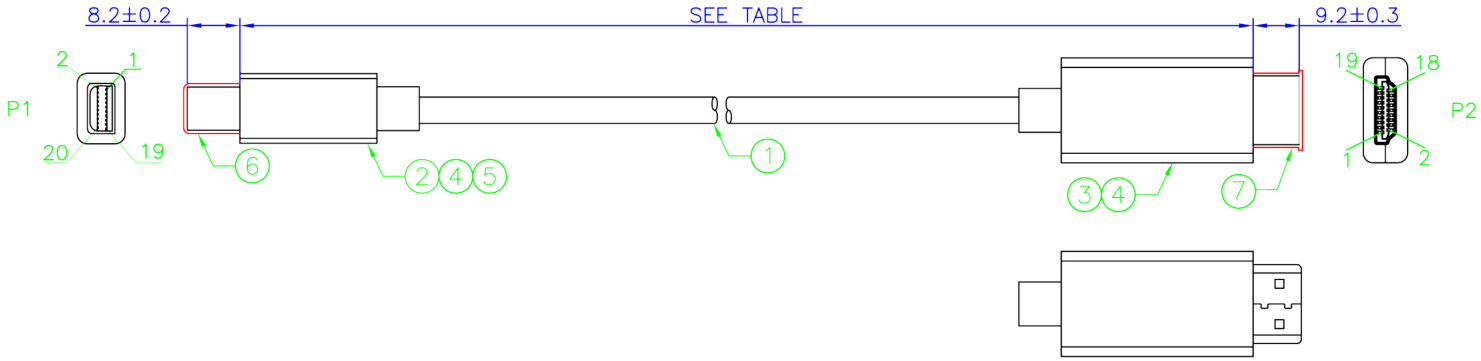

Pin Assignment

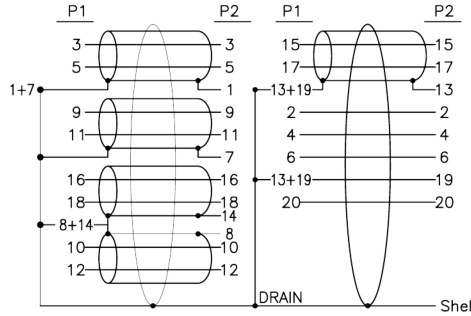

Electrical Test:

1. 100%Test(Open, short, miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot: 100V DC/10ms

NO	DESCRIPTION	Q'TY	UNIT
7	Dust Cover For HDMI	1	pcs
6	Dust Cover For Mini DP	1	pcs
5	Inside Molding: PE	10	g
4	S.R. Molding 45P PVC, Colocr: Snow White	20	g
3	Mini DP to HDMI Converter With HDMI Male, PCB+SMT, HDMI Pin Gold Flash, Shell Gold FlashWith ABS Plastic Hood	1	pcs
2	Mini Display Port Male, Insulation: White, Material: LCP, Pin Gold Plated, Shell Gold Flash	1	set
1	Display Port Cable UL20276 [32AWG(7/0.08TC)*1P+D.W+AL+Mylar)*5+32AWG (7/0.08TC)*5C+AL/MY+D.W+BD+Jacket PVC Color:Snow White OD:4.8±0.2mm	L	M

TOLERANCE	INCHES	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY	
CHECK BY	
APPD BY	

Comprehensive Connectivity Company

TITLE: MINI DP M TO HDMI M 32AWG

CUSTOMER :	
CUSTOMER P/N:	MDP-HD-xxST
SCALE	NONE
UNIT	MM
DATE	2011.05.13
DRAWING NO:	
REV	A
	1/1